

MARION COUNTY SURVEYOR'S OFFICE



SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 24 TWN. 15_N RNG. 3_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 8-11-09
Party Chief: Wilcoxon
Crew: Finney
Type of Marker: Harrison
Method of Establishment: County: 3-7-1997
IN S.P.C. E Zone, NAD 83
Name: 15032403
N: 498 462.986 0(m)
E: 59 449.492 0(m)

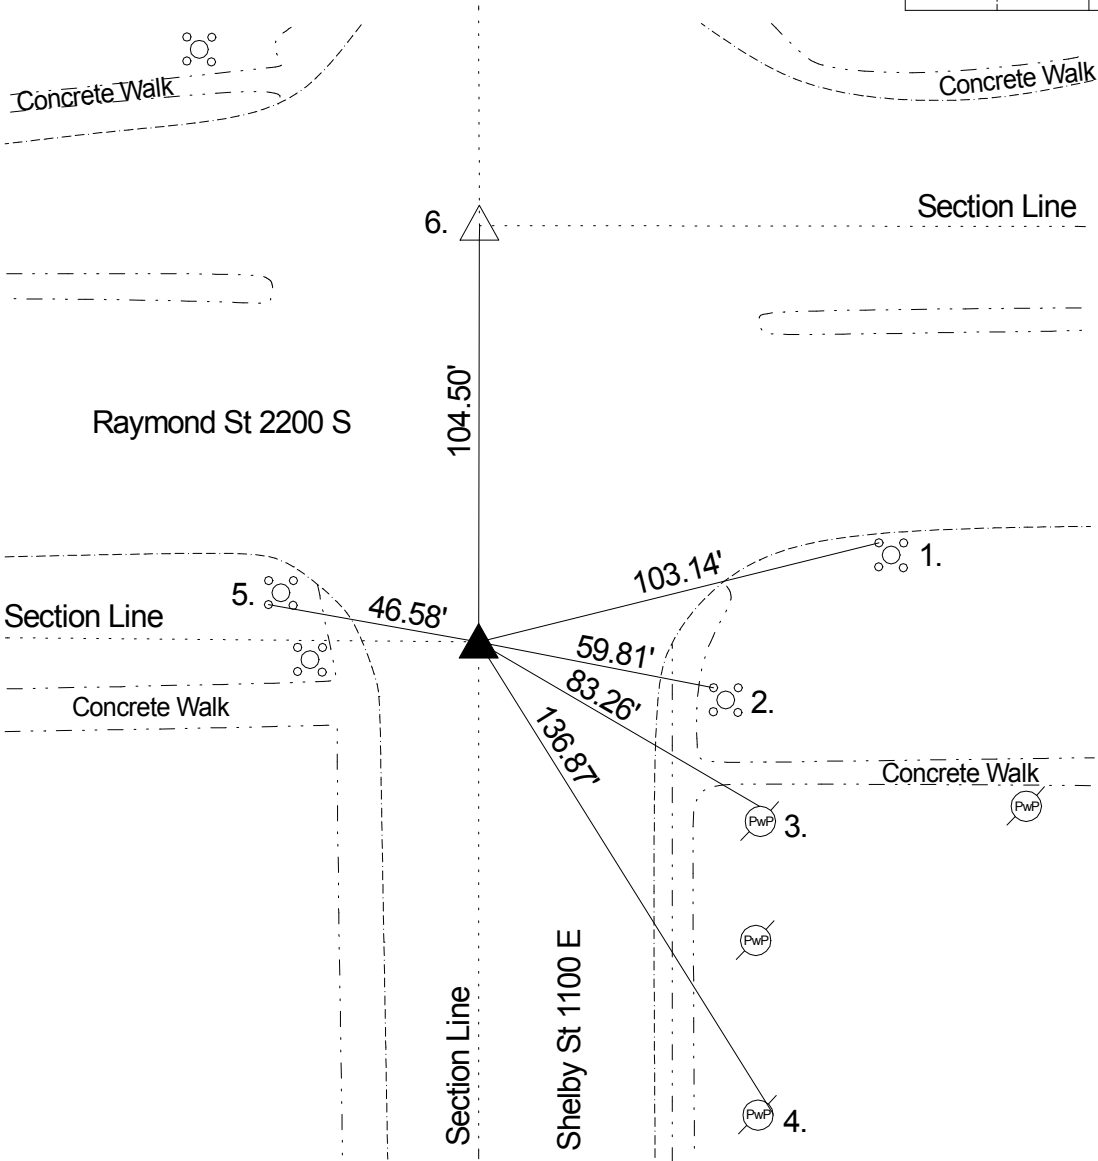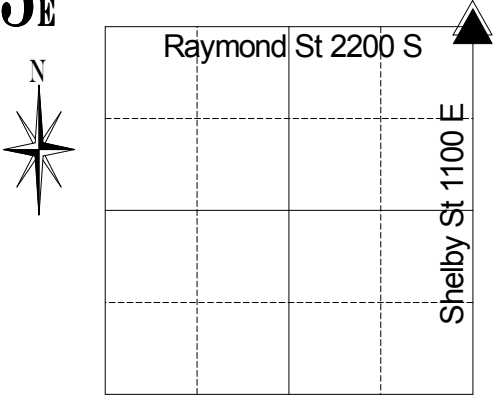

Original post set in 1820 by Laughlin with witnesses: 6" hickory N 46 W 3 links; 7" dogwood S 42 E 25 links per Marion County Atlas p. 6. Fatout called no stone or witnesses found. 4-11-1983 Cleveland called out as no point set. 6-12-92 Wilcoxon set Harrison in accordance with Raymond Street Construction project. 3-7-1997 Wilcoxon retied. 9-4-2003 Wilcoxon retied. 8-11-09 Wilcoxon retied.

REF.	DISTANCE	DESCRIPTION
1.	103.14'	Cut 'x' W bolt of street light pole base
2.	59.81'	Cut 'x' NW bolt of signal pole base
3.	83.26'	PK nail N PwP #616-608 B at ground level
4.	136.87'	Mag nail with brass washer E PwP no # 12" up
5.	46.58'	Cut 'x' SW bolt of signal pole base
6.	104.50'	Due N to NW corner of 19-15-4 (copperweld) (157 links per Hendricks / 1820)